


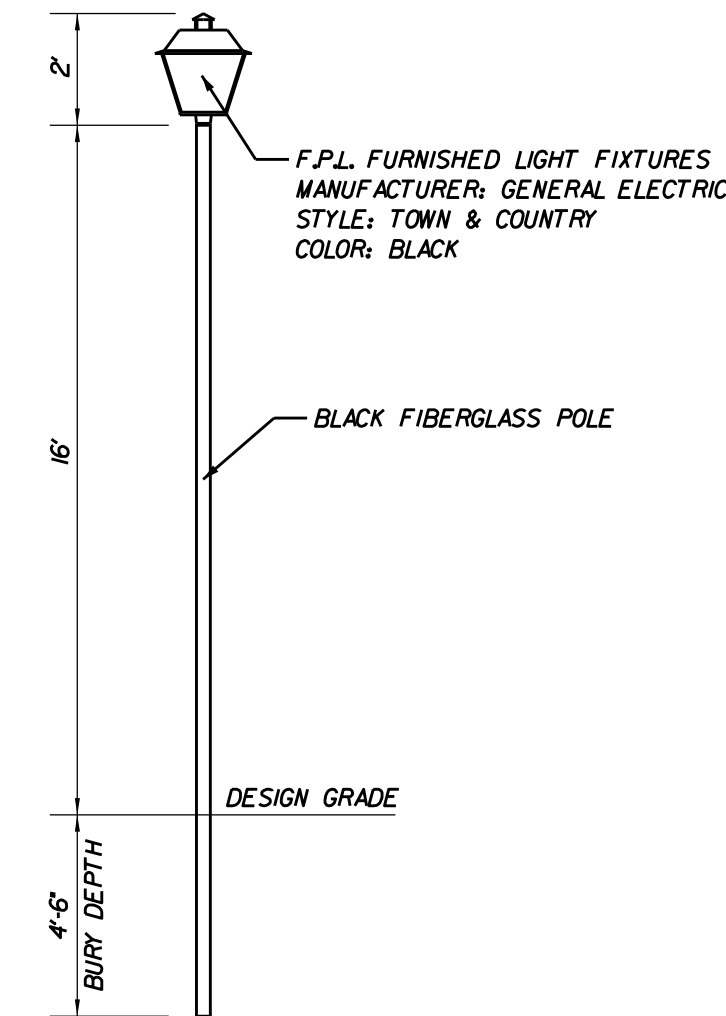

1. THE ABOVE LIGHT POLE DETAIL IS FOR REFERENCE PURPOSES ONLY. REFER TO THE MANUFACTURER'S SPECIFICATIONS FOR THE ACTUAL CONSTRUCTION AND INSTALLATION INFORMATION.
2. THE EXACT LOCATIONS OF THE NEW LIGHT POLES ARE TO BE FIELD ADJUSTED AS REQUIRED, IN ORDER TO AVOID CONFLICTS WITH EXISTING AND PROPOSED UTILITIES, CONCRETE CURBS, SIDEWALKS, ETC... THE LIGHT POLES MUST MAINTAIN A MINIMUM OF 2.5 FEET FROM THE EDGE OF PAVEMENT
3. ALL NEW LIGHT POLES ARE TO BE MANUFACTURED AND INSTALLED TO WITHSTAND 162 MPH WIND LOADS PER THE FLORIDA BUILDING CODE.

STATISTICS					
Description	Avg	Max	Min	Max/Min	Avg/Min
Residential Roadway	2.0 fc	4.8 fc	1.0 fc	4.8:1	2.0:1

Date: 4/7/2017
Approved by: JAY HUEBNER, P.E.
Registered Engineer No: 54615
State of Florida