



1020 NW 51st Street, Fort Lauderdale, FL 33309
Office: 954.486.8404 Fax: 954.486.9579

LETTER OF TRANSMITTAL

TO : Spencer L.Shambray Purchasing Manager FROM: FEDERICA DOUAIHI
COMPANY : City of Margate DATE: July 11, 2019
ADDRESS : 5790 Margate Blvd Margate, FL 33063 PROJECT: REP# 2019- 008
Phone: 954-935-5255 LOCATION: SOUTHGATE PARK

We are sending you:

- ☒ Delivered by hand
☐ Under separate cover
☐ Pick up
☐ Mail
☐ Faxed

REMARKS:

The following items:

# of Copies	Date	DESCRIPTION
1	7/11/2019	Best and Final Offer Price Sheet
		Rep No.2019-008 Park Improvement -Southgate Park

The items are transmitted as indicated below:

- ☒ For Review and Approval
☐ As requested
☒ For your use
☐ Other _____

Received by: _____

Date: _____

S:\OFFICE FORMS\LOT.XLS

REVISED
BEST AND FINAL OFFER PRICE SHEET

RFP NO. 2019-008 PARK IMPROVEMENTS – SOUTHGATE PARK

The below items are **MANADATORY** and numbered as per original RFP Proposal Form, please complete all line items.

1. Updated RFP 2019-008 Proposal Form (Revised Item Specifications)

- A. Remove/Replace Existing Playground
(Price Line A using the following
Manufacturer's for shade covering and
turf. Also see specifications on lighting.)

\$ 388,000.00

Shade Canopy – Shade Systems Inc.

Turf – ForeverLawn Playground Extreme
Playground Grass with zero infill.

Lighting – Four (4) LED lights with automatic
light controls to include diming capabilities.

2. Additional Line Items

- G. Concrete curbing to border sides of walking
path. (Curb height level with walking path)

\$ 38,000.00

- H. Remove all 4 FT high fencing. Replace with
4 FT high black vinyl 11 gauge interior
chain-link fence material with top and
bottom rails.

\$ 16,566.00

- I. Outdoor Fitness Equipment:
Six (6) station fitness equipment along
walking path. Open to all major
manufacturers.

\$ 38,650.00

- J. Remove and replace existing basketball
posts and goals with:
Jay Pro Sports: 4 ½" Diameter Gooseneck
Post – 4" offset/43" Rectangular Acrylic
Backboard (ACRB-72M), Double Rim Goal
(GDR-54), Item #996-AC-DR

\$ 9,638.00

- K. Provide and install five (5) Park Benches
(Along walking path) with:
Pride Enterprises: Plastic Contour Bench/
Size: 6'/Color: Cedar Plank, Black Frame
Powdered Coated/In-ground mount. \$ 7,812.00
- L. Provide and install outdoor chilled drinking
fountain with bottle filler to be located
between the basketball courts and
playground. Open to all major
manufacturers. \$ 21,780.00
- M. Permit Fees Allowance \$ 40,000.00
(Allowance shall be a direct pass through for
permit fee costs only. Documentation of permit
fees will be required for approval.)

The below items are NON-MANADATORY and you are not required to provide an alternative product. However, the City will give consideration to alternate products proposed in lieu of the shade canopy and turf specified in 1A.

Shade Canopy

Alternate manufacturer for shade canopy that covers 100% of playground area. Please provide specification sheet and warranty information for alternate canopy.

\$ +/- N/A
(+plus or -minus
Line A Proposal
Form)

Turf

Playground Safety Surface (GRASS) with ASTM safety standards and no infill. Please provide specification sheet and warranty information for alternate turf.

\$ +/- -12,000.00
(+plus or -minus
Line A Proposal
Form)

Company Name: MBR Construction, Inc.

Proposer's Name: Michael R. Boss, President

Proposer's Signature: [Signature]

Date: 7/11/19

Contour

Whether you seek a seat for a quick or leisurely rest, the contour bench combines quality and simple comfort in a easy-to-use design.

Wood Contour Benches

The ruggedly constructed wood contour benches are attractive and provide long-lasting comfort.

Item	Product ID	Dimensions
6' Wood Contour Bench, In-Ground Mounted	14167701NA	20"w x 53"H x 6'L
8' Wood Contour Bench, In-Ground Mounted	14167702NA	20"w x 53"H x 8'L
6' Wood Contour Bench, Surface-Mounted	14167704NA	20"w x 35"H x 6'L
8' Wood Contour Bench, Surface-Mounted	14167705NA	20"w x 35"H x 8'L



Plastic Contour Benches

Plastic contour wood benches are the perfect eco-friendly seating selection for extensive sitting. Available in cedar or sand-colored recycled plastic.

Item	Product ID	Dimensions
6' Plastic Contour Bench, In-Ground Mounted	14167701PLA	20"w x 53"H x 6'L
8' Plastic Contour Bench, In-Ground Mounted	14167702PLA	20"w x 53"H x 8'L
6' Plastic Contour Bench, Surface-Mounted	14167704PLA	20"w x 35"H x 6'L
8' Plastic Contour Bench, Surface-Mounted	14167705PLA	20"w x 35"H x 8'L



Metal Contour Benches

Merging comfort and style, the metal contour benches are available in the powder-coat, galvanized, or Plascoat™ color of your choosing. Available with punched or lasered patterns.

Item	Product ID	Dimensions
6' Metal Contour Bench, Surface-Mounted	97305B	23"w x 37"H x 6'L
8' Metal Contour Bench, Surface-Mounted	90367	28"w x 37"H x 8'L
6' Metal Contour Bench, In-Ground Mounted	97304B	23"w x 37"H x 6'L
8' Metal Contour Bench, In-Ground Mounted	90366	28"w x 37"H x 8'L



**Most
Dependable
Fountains, Inc.**


OPERATIONS MANUAL

**MODELS:
10145-18 SM
& 10145-18 SMSS**

Most Dependable Fountains, Inc™
5705 Commander Drive
Arlington, TN 38002
800-552-6331
www.mostdependable.com




MOST DEPENDABLE FOUNTAINS, INC.
 5705 COMMANDER DR. P.O. BOX 587
 ARLINGTON, TN 38002-0587
 TOLL FREE: 1-800-552-6331
 PHONE: (901) 867-0039
 FAX: (901) 867-0159
 www.mostdependable.com

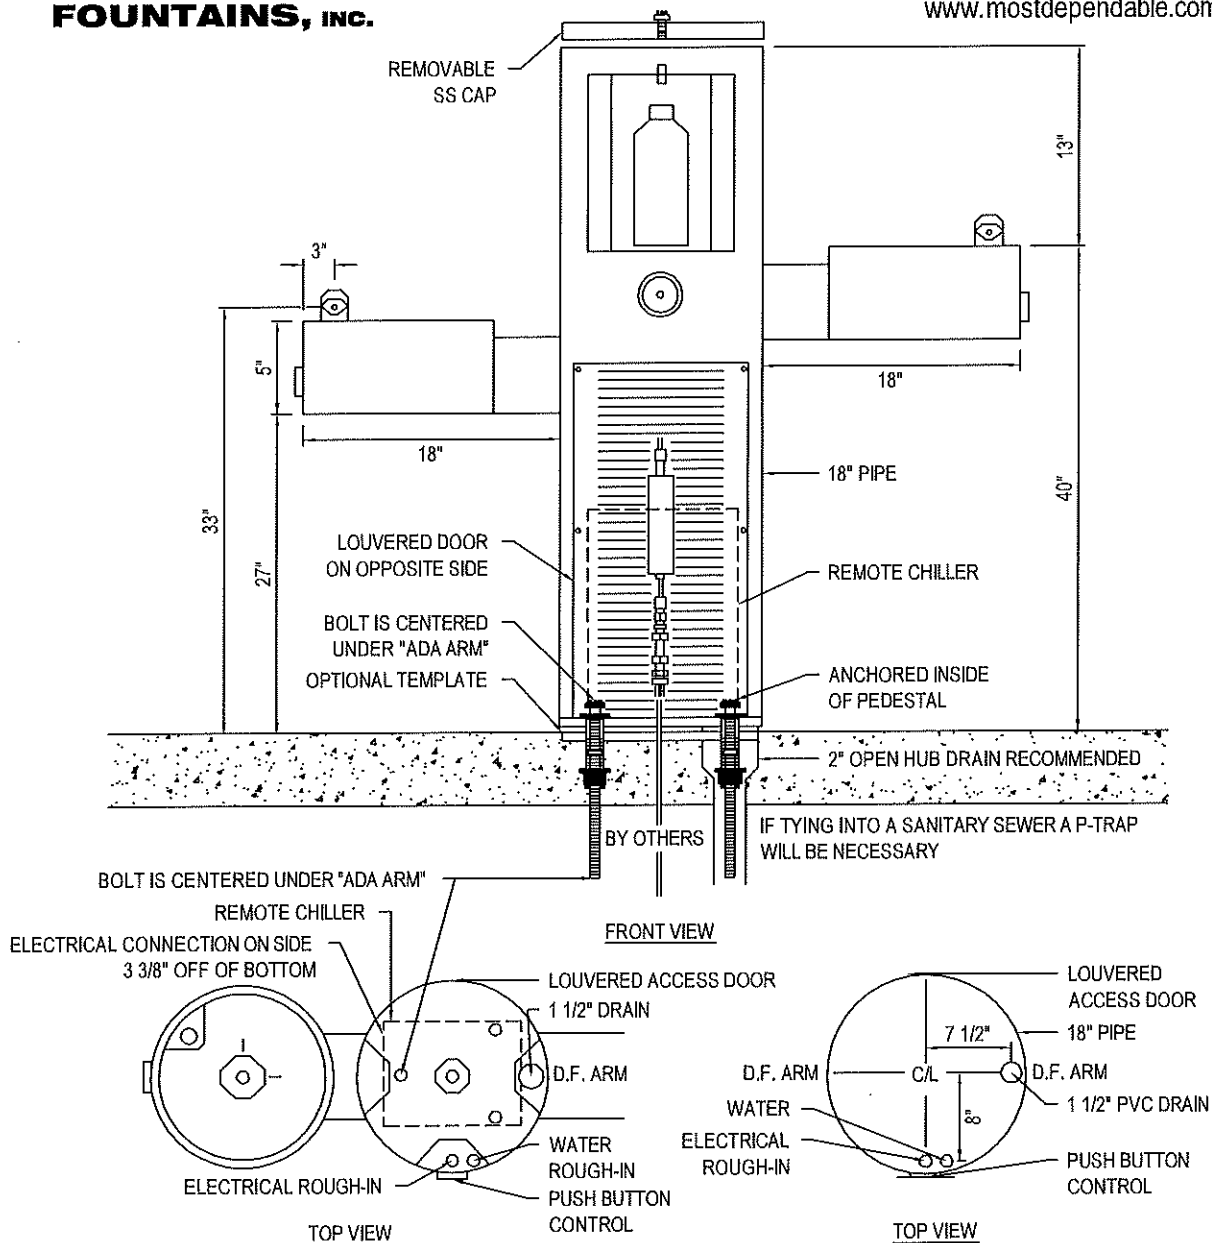

NOTES:

1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
2. NOTE TO ARCHITECT, SCALE DRAWING IN AUTOCAD MODEL SPACE.
3. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
4. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.
5. CONTRACTOR'S NOTE: FOR PRODUCT AND COMPANY INFORMATION VISIT www.CADdetails.com/info AND ENTER REFERENCE NUMBER 3354-21-13



MODEL 10145-18 SM

SHOWN W/ REMOTE CHILLER, SHOWN W/ OPTIONAL TEMPLATE



PEDESTAL BOTTLE FILLER CHILLED SPECIFICATIONS

WATER QUALITY (LEAD FREE)

■ STANDARD PEDESTAL

OR

■ STAINLESS STEEL PEDESTAL

RECEPTOR BOWL

BOTTLE FILLER SPOUT

BUBBLER HEAD

PUSH BAR

CONTROL VALVE

WATER SUPPLY (LEAD FREE)

DRAIN

FINISH

INSTALLATION

CHILLER and WINTERIZATION

WARRANTY

SHIPPING WEIGHT

Section 9, California Proposition 6 and the Federal Safe Drinking Water Act.
One piece weld construction with MDF standard 3/16" wall thickness.

One piece weld construction with MDF standard 304 schedule 10 stainless steel.

18 gauge electro-polished stainless steel bowl. Bowl overlaps pedestal, preventing buildup of residue in visual drinking area. Optional stainless steel Bowl Strainer recommended for areas with sand. Not applicable on Model 1012518 SM/SMSS.

Sanitary recessed nozzle.

Stainless steel anti-squirt head (weighing a pound and a half) mounted with a lock nut and washer to prevent tampering. Lock nut pin holds bubbler in locked position to prevent twisting or turning. The MDF bubbler head has a unique design that features a steady stream trajectory and a built in natural shield from contamination. Not applicable on Model 1012518 SM/SMSS.

304 stainless steel with circumference exceeding 8.6". Mushroom style push bar overlaps and prevents sand and other objects from sticking push bar in the ON position. Stainless steel bubbler housing standard.

Requires less than 5 lbs to operate. Non-cartridge O-ring valve delivers steady stream of water through an adjustable valve. This valve design is to operate and function at 30 to 80 PSI. Ideal operating pressure is 60 PSI.

Maintenance free reinforced nylobraid tubing - **this tubing is not plastic**. It is supplied with a 1/2" MIP threaded inlet with stainless steel strainer. Union fittings at every connection. Supply line stops above grade. Water Filter is standard on this model.

1 1/2" schedule 40 PVC pipe. Drain line stops above grade.

Oven baked powder coat. Choice of colors are: ☐ green, ☐ blue, ☐ black, ☐ red, ☐ yellow, ☐ orange, ☐ brown and ☐ white. Textured color choices: ☐ emerald, ☐ sapphire, ☐ pyrite, ☐ text-black, ☐ burgundy, ☐ gold vein, ☐ copper and ☐ sand-stone. Stainless steel models are powder coated for added protection. The color ☐ chrome is available for stainless steel models only.

Surface Mount installation, is designed to be anchored on top of an existing surface (concrete, etc.) with anchor bolts through a mounting plate that is welded to the fountain. Surface Mount Fountains provide an access door with vandal resistant stainless steel screws. Surface mount carrier recommended for all surface mount installations. Access door standard on all pedestal fountains.

Chilling capacity 8 gallons per hour. NO lead design. 115 VAC. Shut off water and drain down. Remove water filter and chiller if applicable.

One year warranty, labor not included.

Model 1012518 SM.....	290 lbs	Model 1014518 SM.....	408 lbs	Model 1015518 SM.....	320 lbs
Model 1012518 SMSS...	290 lbs	Model 1014518 SMSS...	408 lbs	Model 1015518 SMSS...	320 lbs
Model 1013518 SM.....	390 lbs	Model 1015018 SM.....	380 lbs		
Model 1013518 SMSS...	390 lbs	Model 1015018 SMSS...	380 lbs		

MOST DEPENDABLE FOUNTAINS, INC.™
(800) 552-6331 • (901) 867-0039 • Fax (901) 867-4008
5705 COMMANDER DR. • ARLINGTON, TN 38002-0587
www.mostdependable.com



INSTALLATION INSTRUCTIONS

Most Dependable Fountains, Inc.™

All **SM (surface mount)** products are designed to be installed on the surface of a new or existing concrete slab. Your contractor needs to provide a 1 ½" PVC drain line (**when applicable**) and water line thru finish grade. Connections are made to our SM products thru our access door, as shown on detail drawings. The water tubing is provided with a ½" male iron pipe connection. This is an excellent location for a cutoff valve. Surface Mount units are anchored to the existing concrete by means of ½" concrete shields with bolts or we recommend ½" quick bolts.

Note: We offer an optional template which is designed to be poured in the concrete slab. It comes with the necessary vandal resistant stainless steel bolts and washers needed to anchor.

All **DB (direct bury)** products are designed to be installed to a depth of 14" below grade. MDF provides 1 ½" PVC drain line inside the pedestal (**when applicable**) to point of connection by others. MDF also provides reinforced nylobraid flexible tubing with a ½" male iron pipe thread for connection to water supply by others. MDF recommends an optional valve box using a PVC conduit to the pedestal. By using this option you have complete control of your product.

Individual detail drawings available Online or by request.



For more information:
Most Dependable Fountains, Inc.™
www.mostdependable.com
Info@mostdependable.com
800-552-6331
901-867-0039

LIMITED PRODUCT WARRANTY

Most Dependable Fountains, Inc.™

Most Dependable Fountains, Inc.™ warrants that all of its products are guaranteed against defective material or poor workmanship for a period of **one year from date of shipment**. Most Dependable Fountains, Inc.™ liability under this warranty shall be discharged by furnishing without charge any goods, or part thereof, which shall appear to the Company upon inspection to be of defective material or not of first class workmanship. Most Dependable Fountains, Inc.™ will not be liable for the cost of repairs, alterations or replacements, or for any expense connected therewith made by the owner or his agents. Most Dependable Fountains, Inc.™ will not be liable for any damages caused by defective materials or poor workmanship, except for replacements, as provided above. Buyer agrees that Most Dependable Fountains, Inc.™ has made no other warranties either expressed or implied in addition to those above stated. The products manufactured by Most Dependable Fountains, Inc.™ is warranted to function if installation and maintenance instructions provided are adhered to. The units also must be used for the purpose for which they were intended.

