


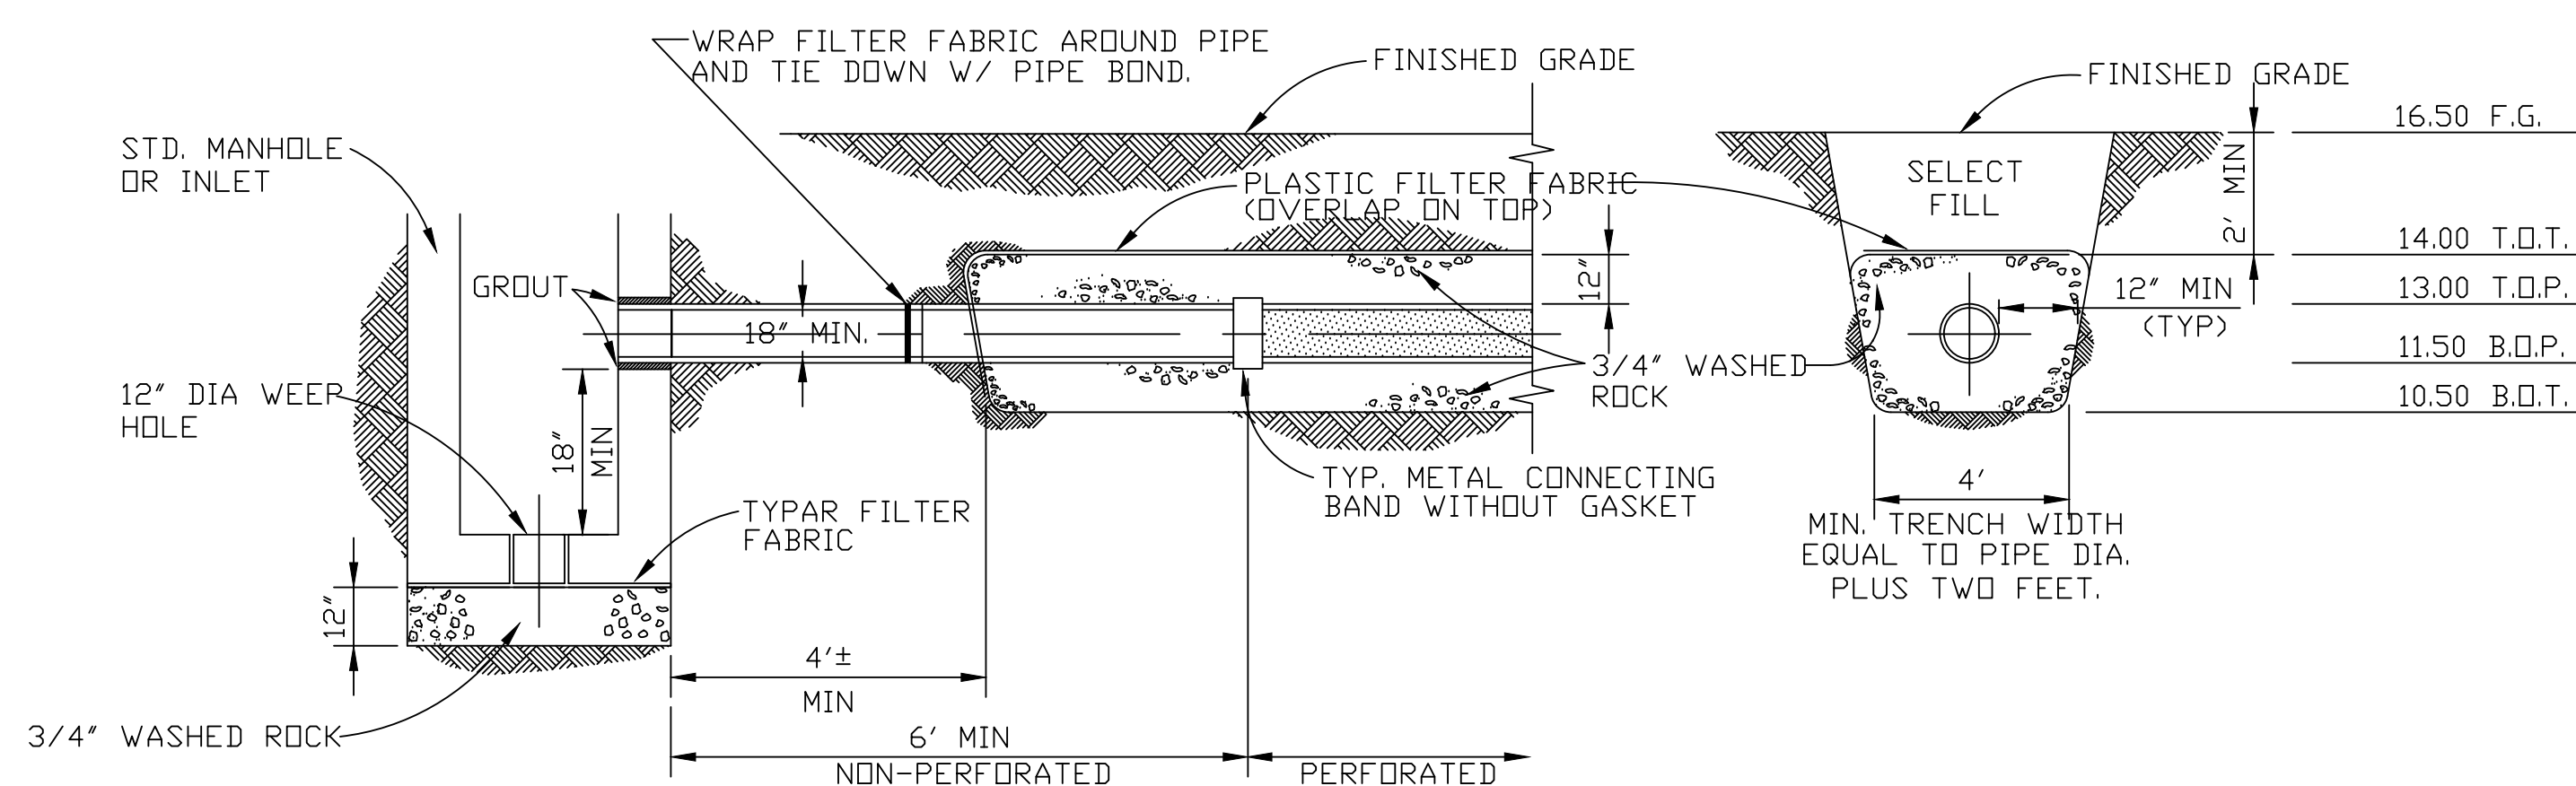


CROSS-SECTION

1. PLASTIC FILTER FABRIC ALL AROUND SHALL BE USED.
2. THE BOTTOM OF THE EXFILTRATION TRENCH SHALL BE AT ELEV. 0.50 NGVD.
3. AFTER THE BALLAST ROCK HAS BEEN PLACED TO THE PROPER ELEVATION, IT SHALL BE CAREFULLY WASHED DOWN WITH CLEAR WATER IN ORDER TO ALLOW FOR INITIAL SETTLEMENT THAT MAY OCCUR. IF IT DOES TAKE PLACE, ADDITIONAL BALLAST ROCK WILL BE ADDED TO RESTORE THE TRENCH BACK TO THE PROPER ELEVATION. THE EXFILTRATION TRENCH BE COMPLETED IN ACCORDANCE WITH THE DETAILS.
4. INLET GRATES SHALL BE COVERED WITH FILTER FABRIC UNTIL SYSTEM IS READY TO ENTER INTO OPERATION.
5. PREFORMED PIPE SHALL HAVE 120-3/8" DIAMETER HOLES PER LINEAR FOOT
6. FOR TRENCH DRAIN AIR RELEASE DETAIL SEE SHEET C-6

LOT 6, BLOCK 3, CENTRAL PARK OF COMMERCE, ACCORDING TO THE PLAT THEREOF,
AS RECORDED IN PLAT BOOK 119, PAGE 27 OF THE PUBLIC RECORDS OF BROWARD
COUNTY, FLORIDA.

N00°22'24"W 313.00'

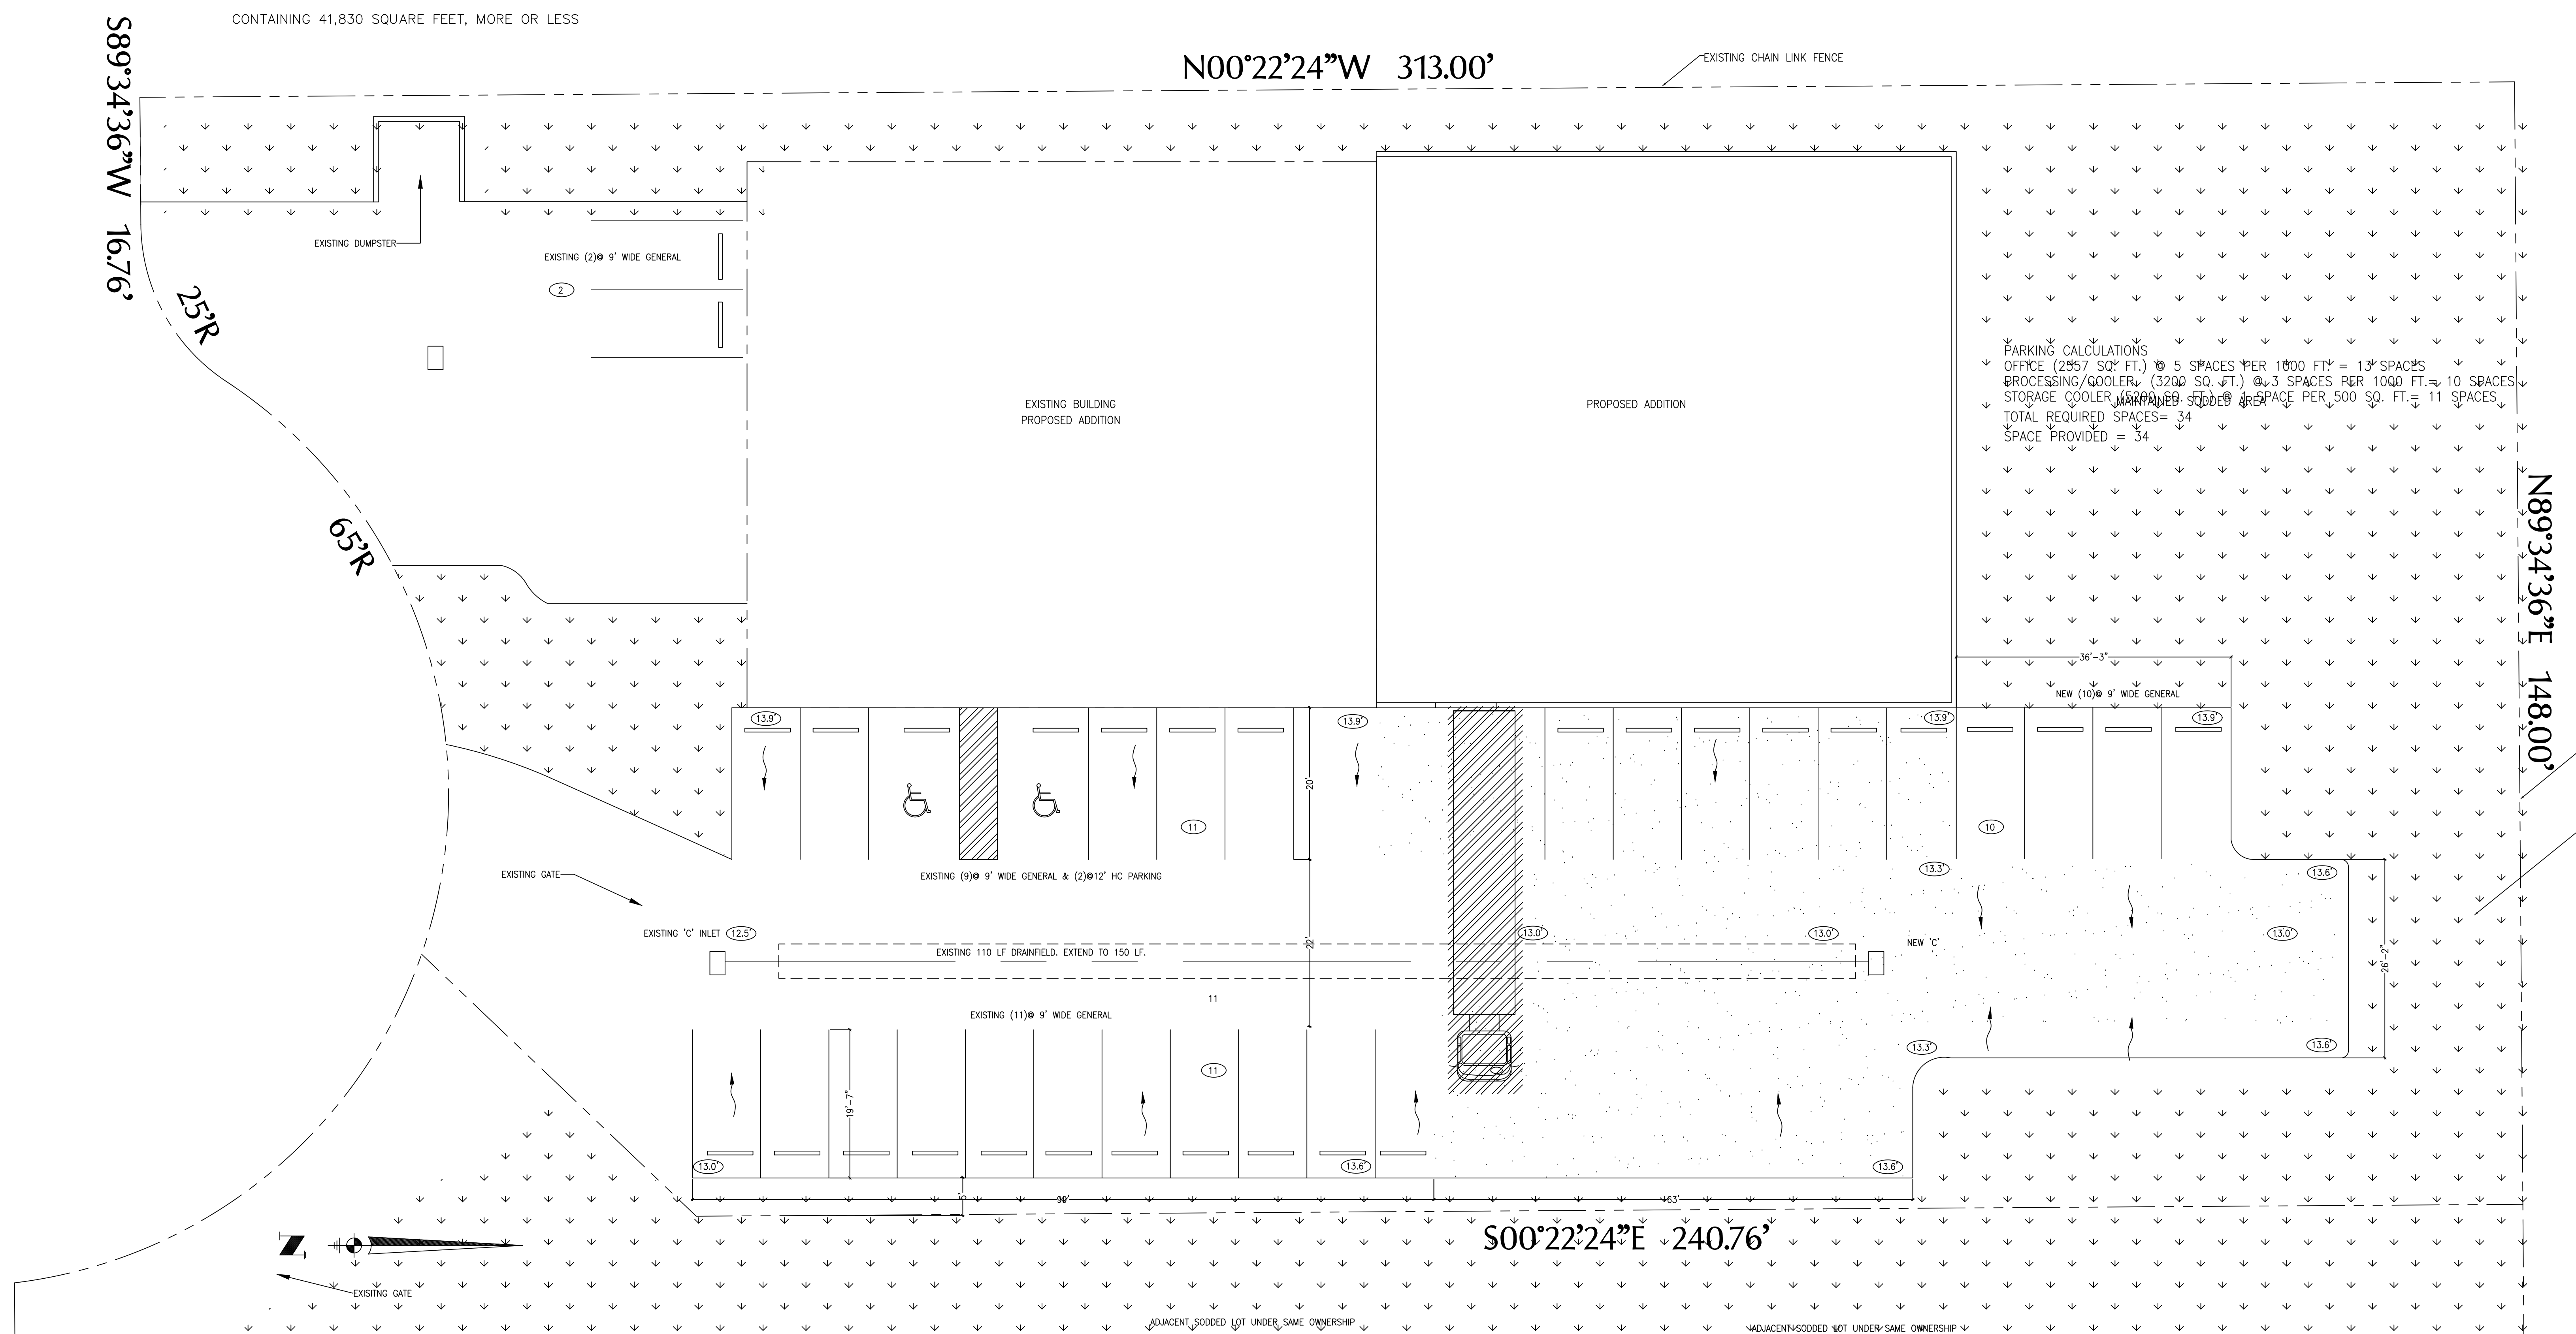

SITE PLAN