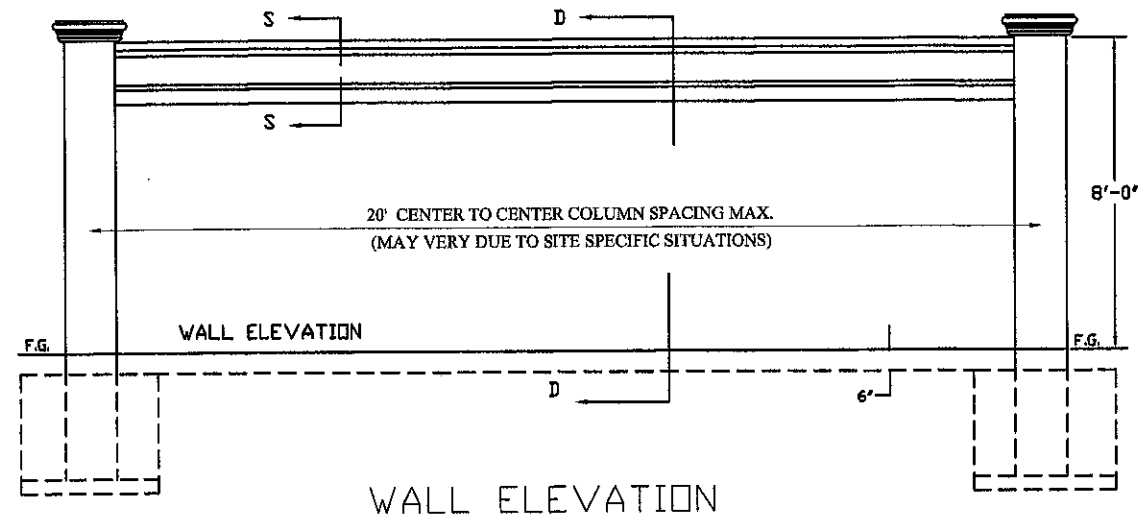
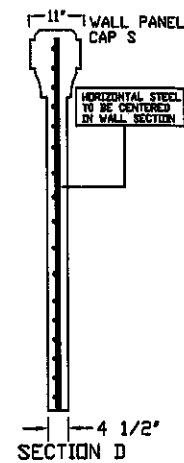
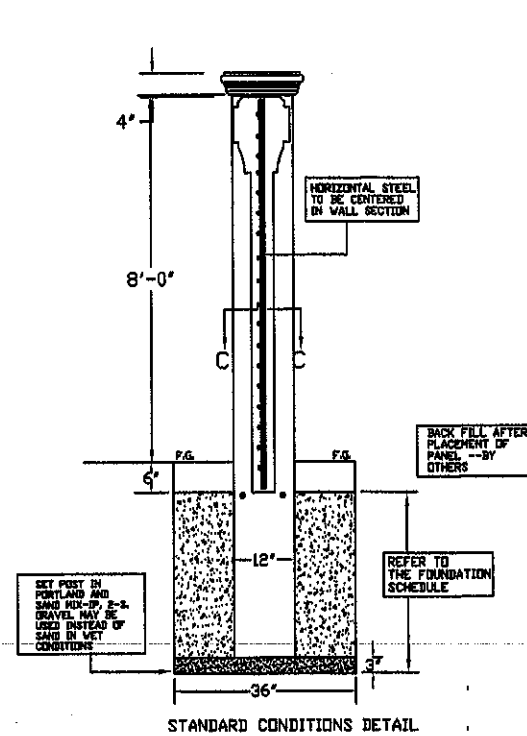


ANZCO INC.


- ☒ SHOP DRAWING
☐ NOA
☐ CATALOG CUT
☐ SAMPLE

- ☒ SUBMITTED FOR APPROVAL
☐ SUBMITTED FOR FILE
☐ RESUBMITTED FOR APPROVAL
☐ REJECTED AND RESUBMIT



Review based solely on the general design requirements of the project's contract documents. Subcontractor to verify dimensions, quantities and field conditions for proper and complete installation of the work. Review of the submittals by ANZCO INC. is not to be interpreted as a detailed investigation of information provided in the submittals or as approved to deviate from the requirements of the contract documents.

By: JOHN ZAK Date: 1/28/15

No.: 001 PRECAST WALL Job: WYTO MARGAR
DRAWING RFP-2014-019

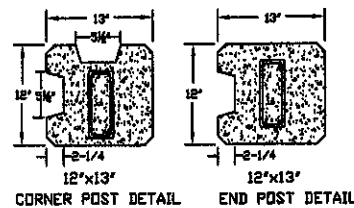

NOTE:
 1/4\"/>



NOTES:

- ALL CONCRETE TO BE 3,000 PSI FOR FOUNDATIONS AND 4,000 PSI FOR ALL PRECAST UNITS
- ALL REINFORCING STEEL TO BE ASTM A615 DEFORMED BARS 60,000 PSI
- WIND LOADS CALCULATED PER ASCE 7-10, CATEGORY 1, FOR WIND LOAD OF 170 MPH 3 SECOND GUST, EXPOSURE "C", FOR A SOLID FENCE
- SOIL BEARING CAPACITY OF 2000 P.S.F. MIN.

PROJECT;

PRECAST WALL SYSTEMS INC.
 1888 NW 22 COURT
 POMPANO BEACH
 FLORIDA 33069
 PH 954-973-8488

FOUNDATION DEPTH SCHEDULE
 BASED ON 36" DIA FOOTING, AND
 SOIL BEARING CAP. OF 2000 P.S.F.

WALL HEIGHT	SOLID ROCK	DRY, UNDISTURBED MEDIUM DENSITY, SAND	SATURATED, UNDISTURBED MEDIUM, DENSITY SAND
8'-0"		4'-6"	
ALTERNATE FOOTING DIMENSIONS			

REINFORCING STEEL SPECIFICATIONS

ALL STEEL: ASTM A615 DEFORMED BARS 60,000 PSI

WALL HEIGHT	POST SIZE	REINF.	HOOPS	MAT SIZE	VERTICAL BARS	HORIZONTAL BARS
8'-0"	12"x13"	4 - #6 RE-BARS	3' ABOVE FTG. THEN 4'-1/2' O.C. TO 2'-6" ABOVE FTG. THEN BAL. AT 18" O.C.	74"x19'0"	.375 DIA. 12' O.C. A.S. 0.110	.375 DIA. 6' O.C. A.S. 0.22

PRECAST WALL SYSTEMS, INC.
 1888 NW 22ND COURT
 POMPANO BEACH, FL 33069
 954-973-8488

JAMES BUSHOUSE P.E.
 PROFESSIONAL ENGINEER 20311
 STATE OF FLORIDA
 1176 SW 4TH CT BOCA RATON
 FLORIDA 33432
 1-861-417-3891

NOT VALID
 WITHOUT
 EMBOSSED SEAL

